






Perhatian!

Sebelum memulai instalasi (pemasangan), harap memperhatikan instalasi dasar.
Jika anda belum mempunyai pengalaman dalam pemasangan, kami sarankan anda datang dan berkonsultasi dengan dealer yang terdekat.

Instalasi



Petunjuk Pemakaian

legacy

Model :

10" LG-1096-2 & 12" LG-1296-2

Ruang Pamer :

Surabaya : Jl. Margomulyo No. 5 Tandes, Surabaya 60185 Telp. : +62-81 231833504

Jakarta : Ruko Glodok Plaza Blok F-97, Jl. Pinangsia Raya, samping Bank OCBC NISP
Mangga Besar - Jakarta Barat. Telp. : 021 - 6493139


Spesifikasi

10" LG-1096-2

Diameter Speaker (inch/mm)	10 inch / 254 mm
Nominal power handling (Watt) ¹	150 Watt
Program power (Watt) ²	300 Watt
Lebar daerah frekuensi (Hz)	34 Hz - 3800 Hz
SPL (2.83 V / 1 m) (dB)	90 dB
Medan magnet (T)	0.8 T
Berat magnet (Kg/Oz)	1.16 kg /40.6 Oz
Voice coil diameter (mm)	49.5 mm
Voice coil material	Asv

- (*) AES standard, test mode with continuous pink noise signal (6 dB crest factor; 2 hours) within the Fo to 10Fo power calculated on rated nominal impedance. Loudspeaker in free air

- (**) Power on continous program is defined as 3dB greater than nominal power handling.

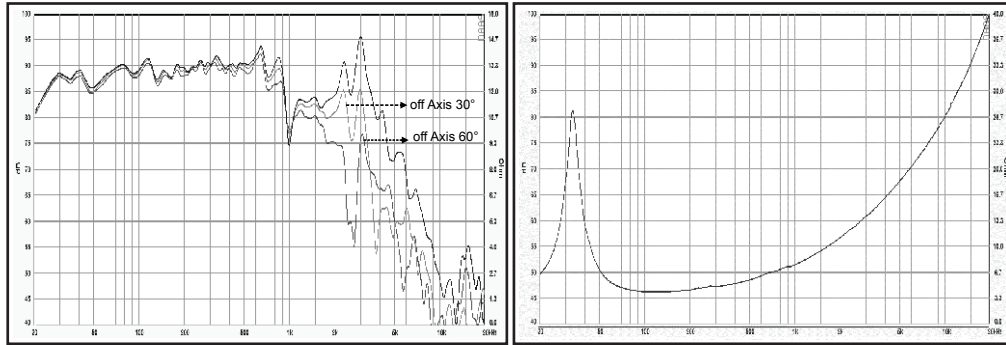

Parameter "Thiele-Small"

	2Ω	4Ω
Fs (Hz)	34 Hz	34 Hz
DCR (Ω)	1.8 Ω	3.6 Ω
Qts	0.36	0.65
Qes	0.39	0.75
Qms	5.38	5.27
Mms (g)	68.5 g	58.7 g
Cms (mm/N)	0.33 mm/N	0.33 mm/N
BL Product (Tm)	8.2 Tm	8.4 Tm
Vas (liters)	58.6 liters	58.2 liters
No (%)	0.54 %	0.28 %
Sd (cm ²)	356.3 cm ²	356.3 cm ²
Xmax (mm)	7.8 mm	7.8 mm


Spesifikasi

12" LG-1296-2

Diameter Speaker (inch/mm)	12 inch / 305 mm
Nominal power handling (Watt) ¹	200 Watt
Program power (Watt) ²	400 Watt
Lebar daerah frekuensi (Hz)	33 Hz - 3300 Hz
SPL (2.83 V / 1 m) (dB)	92 dB
Medan magnet (T)	0.84 T
Berat magnet (Kg/Oz)	1.35 kg /47.3 Oz
Voice coil diameter (mm)	49.5 mm
Voice coil material	Asv

- (*) AES standard, test mode with continuous pink noise signal (6 dB crest factor; 2 hours) within the Fo to 10Fo power calculated on rated nominal impedance. Loudspeaker in free air

- (**) Power on continous program is defined as 3dB greater than nominal power handling.

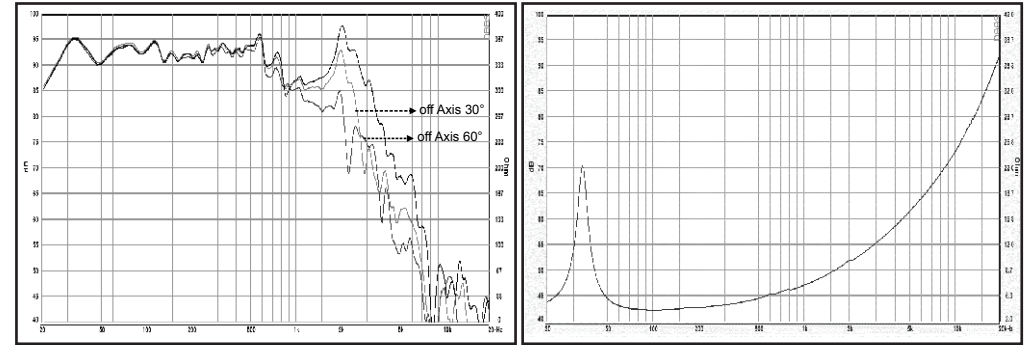

Parameter "Thiele-Small"

	2Ω	4Ω
Fs (Hz)	33 Hz	33 Hz
DCR (Ω)	1.5 Ω	2.9 Ω
Qts	0.44	0.79
Qes	0.48	0.91
Qms	6.16	6.06
Mms (g)	86.2 g	83.4 g
Cms (mm/N)	0.27 mm/N	0.26 mm/N
BL Product (Tm)	7.5 Tm	7.4 Tm
Vas (liters)	99.6 liters	102.2 liters
No (%)	0.73 %	0.39 %
Sd (cm ²)	514.7 cm ²	514.7 cm ²
Xmax (mm)	8.03 mm	8.03 mm